

Discover the features

PRODUCT PROPERTIES

Model	I3SIXTY 3 display
Product ID	TBD

DISPLAY SPECIFICATIONS

Display Technology	Liquid Crystal Display (LCD)
Backlight technology	Direct-LED backlight
Panel size	50"
Display aspect ratio	16:9
Native resolution	3840 x 2160 Pixels - 4K Ultra High Definition
Brightness (typical)	450 cd/m ²
Contrast ratio (typical)	4000:1
Viewing angle	178° / 178°
Color depth	1.07 billion colors (10 bit)
Response time (typical)	8 ms
Refresh rate	60 Hz (@ UHD)
Surface	Tempered glass, anti-reflection
Supported orientation	Landscape & Portrait
Life time	50.000 hours

CONNECTIVITY

2x HDMI
1x DP
1x Type-C 65W, 1x Type-C 15W
1x COAX
1x audio in
1x HDMI
1x 3.5mm audio jack
1x Digital audio out
2x USB 3.0 Type A
2x USB 2.0 Type A
2x USB 2.0 Type B for touch
1x Micro USB
2x LAN: RJ-45 connector (1000 Mbit/sec)
1x RS232
Wi-Fi 802.11 b/g/n/ac
TC card reader (for internal use)

OPERATIONAL SPECIFICATIONS

Operating System	Android 13
Memory	8GB RAM – 128 GB storage
CPU	Octa-core ARM CPU
Interactive touch	Technology: Capacitive
	Connection protocol: HID (Human Interface Device)
	Touch points: 20 simultaneous multi-touch points
Loudspeakers	2x 20-Watt Speakers

PHYSICAL PROPERTIES

VESA Mounting Pattern	400 × 400
Net weight	TBD
Packaged weight	TBD
Dimensions	113,4 x 5,5 x 65,4 cm
Packaging dimensions	TBD

ELECTRICAL PROPERTIES

Input Power	100V ~240V, 50/60 Hz
Power Consumption	TBD

ACCESSORIES

Included	Quick start guide
	Active stylus
	Power cable EU
	Wall mount

SOFTWARE FEATURES

User Interface	i3STUDIO Launcher
Whiteboarding Software	i3WHITEBOARD
Annotation Software	i3WHITEBOARD
Screen casting Software	i3ALLSYNC wireless presenting
Device Management	i3RDM (optional)
Web browser	Chromium
Conferencing Software	Zoom, MSTeams or others
Device Management	I3RDM (optional)
App store	I3STORE & Google Play Store

ENVIRONMENTAL CONDITIONS

Operating Temperature	0°C- 40°C
Operating Humidity	10%-90%, RH Non-Condensing
Operating maximal altitude	5 000 meters
Storage Temperature	-20°C - 40°C
Storage Humidity	10% ⁻ 90% RH Non-Condensing

REGULATORY INFORMATION


Type Approval CE & FCC


WARRANTY


Standard Warranty 3 years, upgradable to 5 years

NOTICE

Exlusive design by i3 – subject to change.

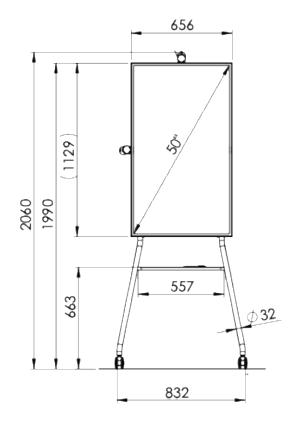


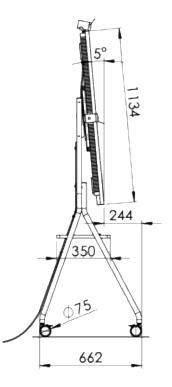

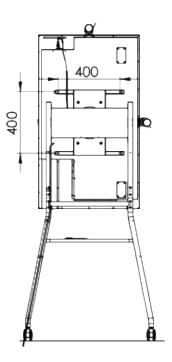



i3SIXTY3 (50) PORTRAIT mm

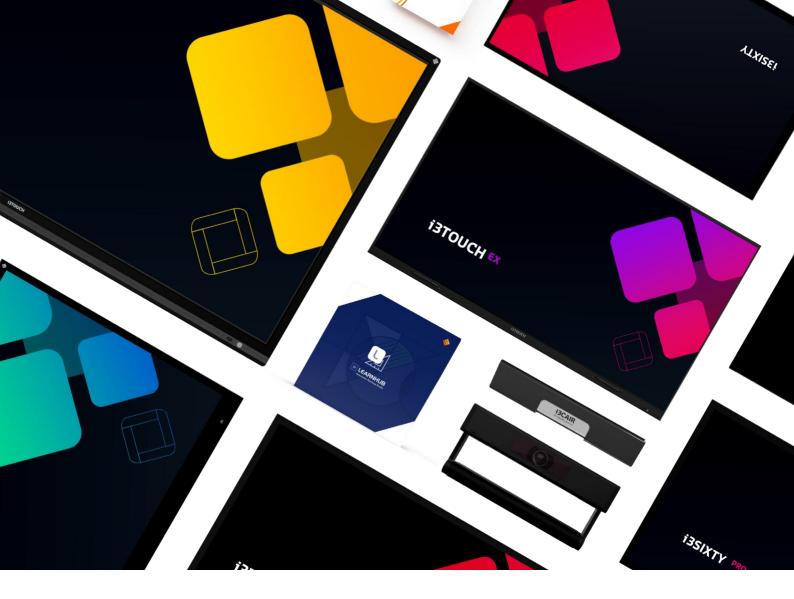

Like to know more ?

Get in touch

i3-TECHNOLOGIES HQ Kleine Schaluinweg 7 3290 DIEST Belgium

TEL: + 32 56 313 415 MAIL: info@i3-technologies.com

Book a demo

Please complete the "book a demo" form and we will get in touch to arrange a virtual tour or work together to see if there are possibilities to book a personal demo near your location.

Book a demo