

i3SIXTY 3

Discover the features

PRODUCT PROPERTIES

Model	i3SIXTY 3 display 50"	i3SIXTY 3 display 65"
Product ID	10010630 (display)	10010631 (display)
	10010675 (display + mobile stand)	

DISPLAY SPECIFICATIONS

Display Technology	Liquid Crystal Display (LCD)	
Backlight technology	Edge-LED backlight	Direct-LED backlight
Panel size	50"	65"
Display aspect ratio	16:9	
Native resolution	3840 x 2160 Pixels - 4K Ultra High Definition	
Brightness (typical)	450 cd/m²	
Contrast ratio (typical)	4000:1	5000:1
Dynamic contrast ratio (typical)	500.000:1	
Viewing angle	178° / 178°	
Color depth	1.07 billion colors (10 bit)	
Response time (typical)	8 ms	
Refresh rate	60 Hz (@ UHD)	
Surface	Optical bonded, tempered glass & anti-reflection	
Supported orientation	Landscape & Portrait	
Life time	50.000 hours 16/7	

CONNECTIVITY

Video & audio input	2x HDMI 2.0 (1x ARC)	2x HDMI 2.0 (1x ARC)
	1x DP 1.2	1x DP 1.2
	1x USB-C Rear (DP1.2+Touch+65W+USB3.0)	1x USB-C Rear (DP1.2+Touch+65W+USB3.0)
	2x USB-A Side (DP1.2+Touch+15W+USB3.0+LAN)	2x USB-A Side (DP1.2+Touch+15W+USB3.0+LAN)
	1x 3.5mm jack Analog Mic In	1x 3.5mm jack Analog Mic In
Video & audio output	1x HDMI 2.0 Out	1x HDMI 2.0 Out
	1x 3.5mm audio jack line Out	1x 3.5mm audio jack line Out
	1x Digital RCA Out (SPDIF)	1x Digital RCA Out (SPDIF)
USB ports	2x USB 3.0 Type A	2x USB 3.0 Type A
	2x USB 2.0 Type A	2x USB 2.0 Type A
	2x USB 2.0 Type B Touch Out	2x USB 2.0 Type B Touch Out
	1x USB 2.0 Type Micro (OTG)	1x USB 2.0 Type Micro (OTG)
Network Connectivity	2x RJ-45 connector (1x LAN in, 1x LAN Out)	2x RJ-45 connector (1x LAN in, 1x LAN Out)
	1x RS232	1x RS232
	Double WiFi module: 1x 802.11ax (WiFi6) + 1x 802.11ac (WiFi5)	Double WiFi module: 1x 802.11ax (WiFi6) + 1x 802.11ac (WiFi5)
Other	1x TF card reader	1x TF card reader

OPERATIONAL SPECIFICATIONS

Operating System	Android 13 EDLA Certified	
Memory	8GB RAM – 128 GB storage	
CPU	Octa-core ARM CPU	
Interactive touch	Technology: Capacitive	
	Connection protocol: HID (Human Interface Device)	
	Touch points: 20 simultaneous multi-touch points	
Loudspeakers	2x 10 Watt	2x 20 Watt

PHYSICAL PROPERTIES

VESA Mounting Pattern	400 x 400	600 x 400
Net weight	26,5 kg	34,2 kg
Packaged weight	32,3 kg	46,6 kg
Dimensions	1134 x 66 x 655 mm	1487 x 83 x 905 mm
Packaging dimensions	1265 x 160 x 734 mm	1657 x 185 x 1007 mm

ELECTRICAL PROPERTIES

Input Power	100V ~240V, 50/60 Hz	
Power Consumption	89.7 W	191.9 W

ACCESSORIES

Included	Quick start guide	
	Active stylus	
	Power cable EU	
	/	Wall mount

SOFTWARE FEATURES

User Interface	i3STUDIO Launcher	
Whiteboarding Software	i3WHITEBOARD	
Annotation Software	i3WHITEBOARD	
Screen casting Software	i3ALLSYNC wireless presenting	
Device Management	i3RDM (optional)	
Web browser	Chromium	
Conferencing Software	Zoom, MS Teams or others	
Device Management	i3RDM (optional)	
App store	i3STORE & Google Play Store	

ENVIRONMENTAL CONDITIONS

Operating Temperature	0°C- 40°C
Operating Humidity	10%-90%, RH Non-Condensing
Operating maximal altitude	5 000 meters
Storage Temperature	-20°C - 40°C
Storage Humidity	10% ~90% RH Non-Condensing

REGULATORY INFORMATION

Type Approval	CE, FCC, UKCA, EU Eco Design (ErP), RoHS.
---------------	---


WARRANTY

Standard Warranty	3 years, upgradable to 5 years
-------------------	--------------------------------


NOTICE

Exclusive design by i3 – subject to change.


TECHNICAL DRAWINGS (i3SIXTY 3 50")

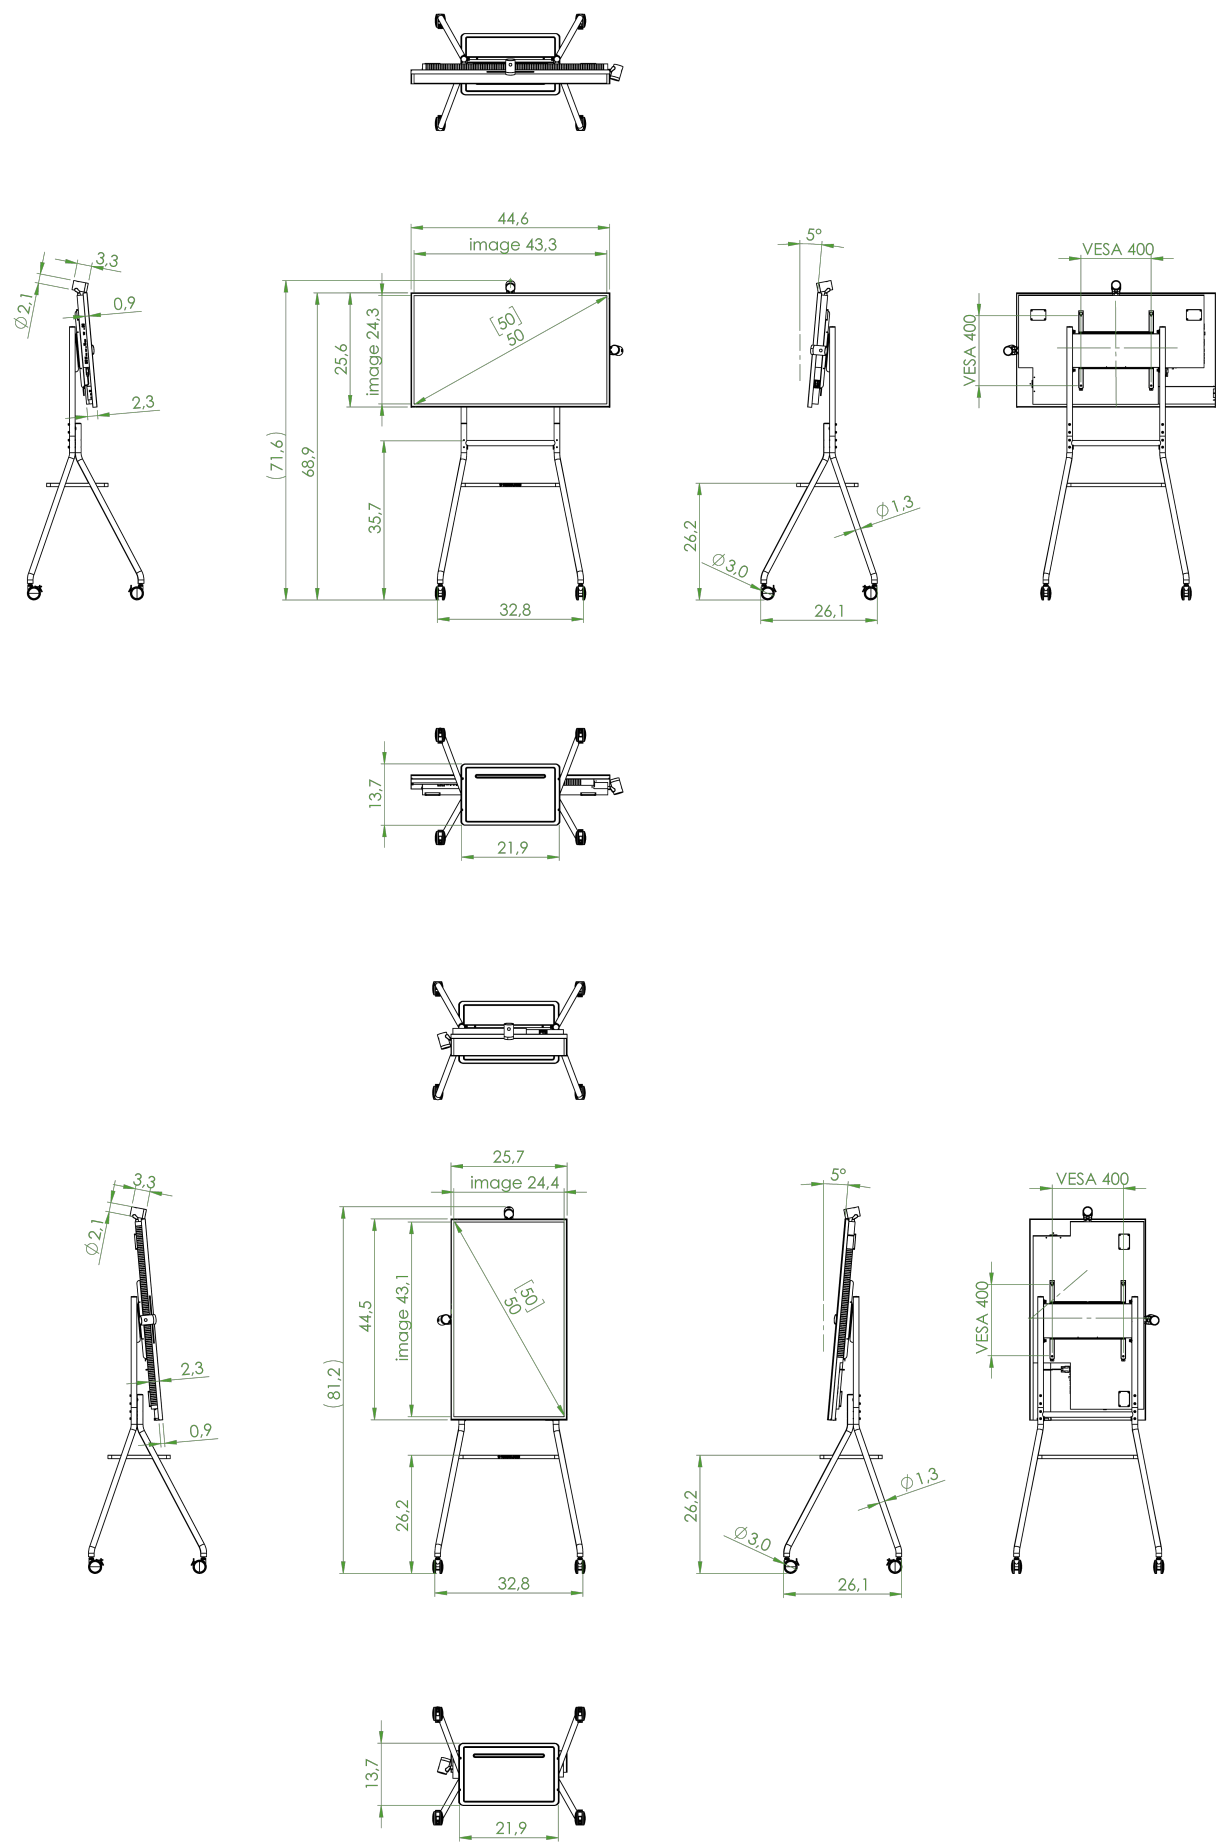

TECHNICAL DRAWINGS (i3SIXTY 3 65")

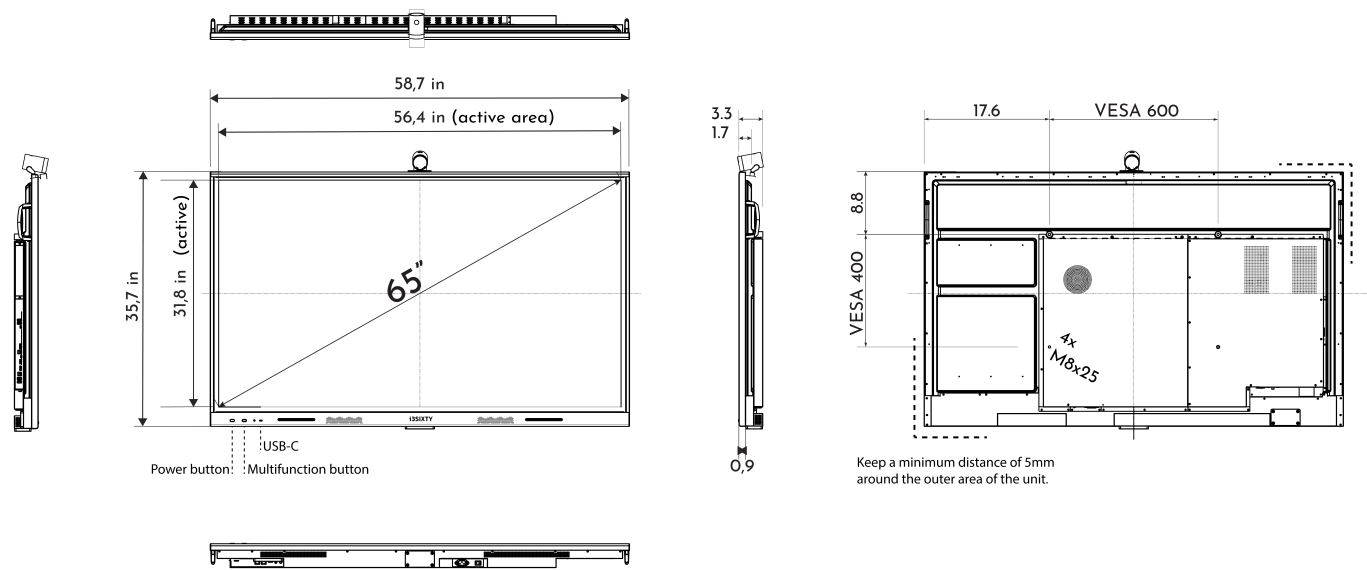

Model Name: i3SIXTY 65 ISO

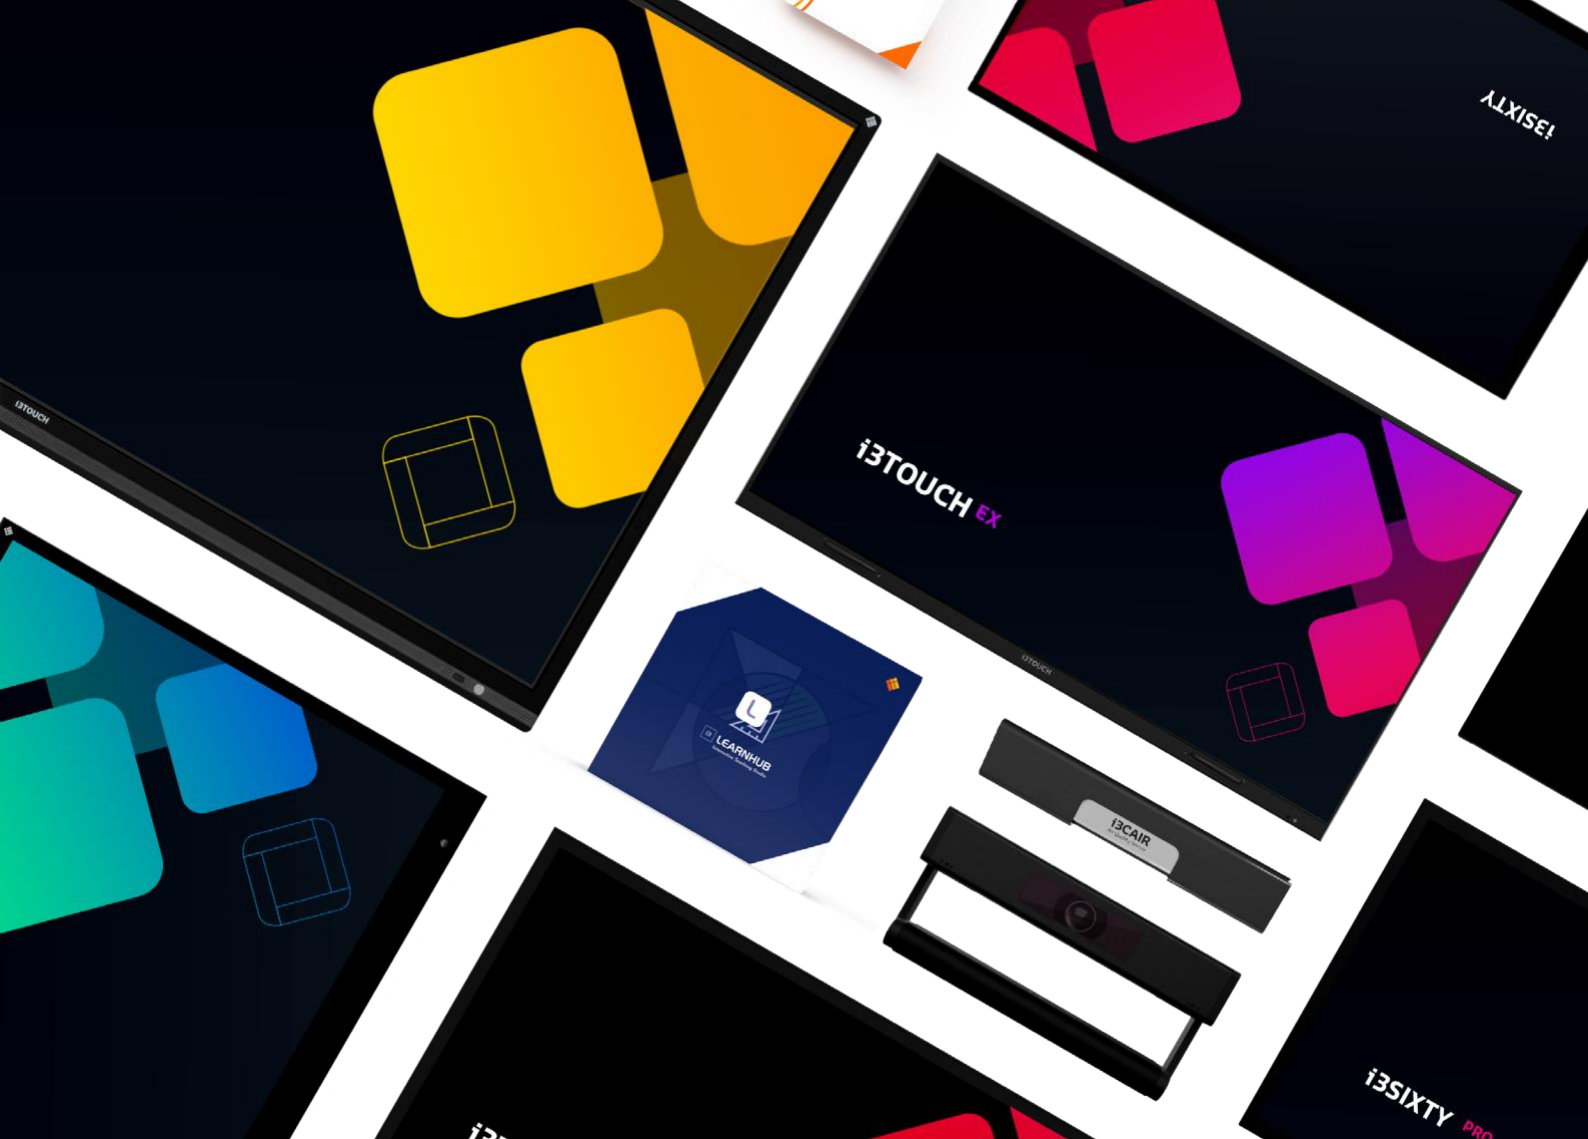

Like to know more ?

Get in touch

i3-TECHNOLOGIES HQ
Kleine Schaluinweg 7
3290 DIEST
Belgium

TEL: + 32 56 313 415
MAIL: info@i3-technologies.com

Book a demo

Please complete the "book a demo" form and we will get in touch to arrange a virtual tour or work together to see if there are possibilities to book a personal demo near your location.

[Book a demo](#)