

# i3SIXTY 3

Discover the features

## PRODUCT PROPERTIES

<b>Model</b>	I3SIXTY 3 display 50"	I3SIXTY 3 display 65"
<b>Product ID</b>	10010630 (display) 10010675 (display + mobile stand)	10010631 (display)

## DISPLAY SPECIFICATIONS

<b>Display Technology</b>	Liquid Crystal Display (LCD)	
<b>Backlight technology</b>	Direct-LED backlight	
<b>Panel size</b>	50"	65"
<b>Display aspect ratio</b>	16:9	
<b>Native resolution</b>	3840 x 2160 Pixels - 4K Ultra High Definition	
<b>Brightness (typical)</b>	450 cd/m <sup>2</sup>	
<b>Contrast ratio (typical)</b>	4000:1	
<b>Viewing angle</b>	178° / 178°	
<b>Color depth</b>	1.07 billion colors (10 bit)	
<b>Response time (typical)</b>	8 ms	
<b>Refresh rate</b>	60 Hz (@ UHD)	
<b>Surface</b>	Tempered glass, anti-reflection	
<b>Supported orientation</b>	Landscape & Portrait	
<b>Life time</b>	50.000 hours 16/7	

## CONNECTIVITY

<b>Video &amp; audio input</b>	2x HDMI	HDMI IN 2.0*1, HDMI IN 2.0(ARC)*1
	1x DP	1 x DP
	1x Type-C 65W, 1x Type-C 15W	1x Type-C 100W, 1x Type-C 15W
	1x COAX	1x COAX
	1x audio in	1x audio in
<b>Video &amp; audio output</b>	1x HDMI	1x HDMI
	1x 3.5mm audio jack	1x 3.5mm audio jack
	1x Digital audio out	1 x Line out
<b>USB ports</b>	2x USB 3.0 Type A	2x USB 3.0 Type A
	2x USB 2.0 Type A	2x USB 2.0 Type A
	2x USB 2.0 Type B for touch	2x USB 2.0 Type B for touch
	1x Micro USB	/
<b>Network Connectivity</b>	2x LAN: RJ-45 connector (1000 Mbit/sec)	1 x RJ45 IN*1, 1 x RJ45 Out
	1x RS232	1x RS232
	Wi-Fi 802.11 b/g/n/ac	Wi-Fi 802.11 b/g/n/ac
<b>Other</b>	TC card reader (for internal use)	1 x TF CARD (for internal use)

## OPERATIONAL SPECIFICATIONS

<b>Operating System</b>	Android 13
<b>Memory</b>	8GB RAM – 128 GB storage
<b>CPU</b>	Octa-core ARM CPU
<b>Interactive touch</b>	Technology: Capacitive
	Connection protocol: HID (Human Interface Device)
	Touch points: 20 simultaneous multi-touch points
<b>Loudspeakers</b>	2x 20-Watt Speakers

## PHYSICAL PROPERTIES

<b>VESA Mounting Pattern</b>	400 x 400	
<b>Net weight</b>	TBD	
<b>Packaged weight</b>	TBD	
<b>Dimensions</b>	113,4 x 5,5 x 65,4 cm	TBD
<b>Packaging dimensions</b>	TBD	

## ELECTRICAL PROPERTIES

<b>Input Power</b>	100V ~240V, 50/60 Hz
<b>Power Consumption</b>	TBD

## ACCESSORIES

<b>Included</b>	Quick start guide
	Active stylus
	Power cable EU
	Wall mount

## SOFTWARE FEATURES

<b>User Interface</b>	i3STUDIO Launcher
<b>Whiteboarding Software</b>	i3WHITEBOARD
<b>Annotation Software</b>	i3WHITEBOARD
<b>Screen casting Software</b>	i3ALLSYNC wireless presenting
<b>Device Management</b>	i3RDM (optional)
<b>Web browser</b>	Chromium
<b>Conferencing Software</b>	Zoom, MS Teams or others
<b>Device Management</b>	i3RDM (optional)
<b>App store</b>	i3STORE & Google Play Store

## ENVIRONMENTAL CONDITIONS

Operating Temperature	0°C- 40°C
Operating Humidity	10%-90%, RH Non-Condensing
Operating maximal altitude	5 000 meters
Storage Temperature	-20°C - 40°C
Storage Humidity	10% -90% RH Non-Condensing

## REGULATORY INFORMATION

Type Approval	CE & FCC
---------------	----------


## WARRANTY

Standard Warranty	3 years, upgradable to 5 years
-------------------	--------------------------------



## NOTICE

Exclusive design by i3 – subject to change.

# TECHNICAL DRAWINGS ( i3SIXTY 3 50" )

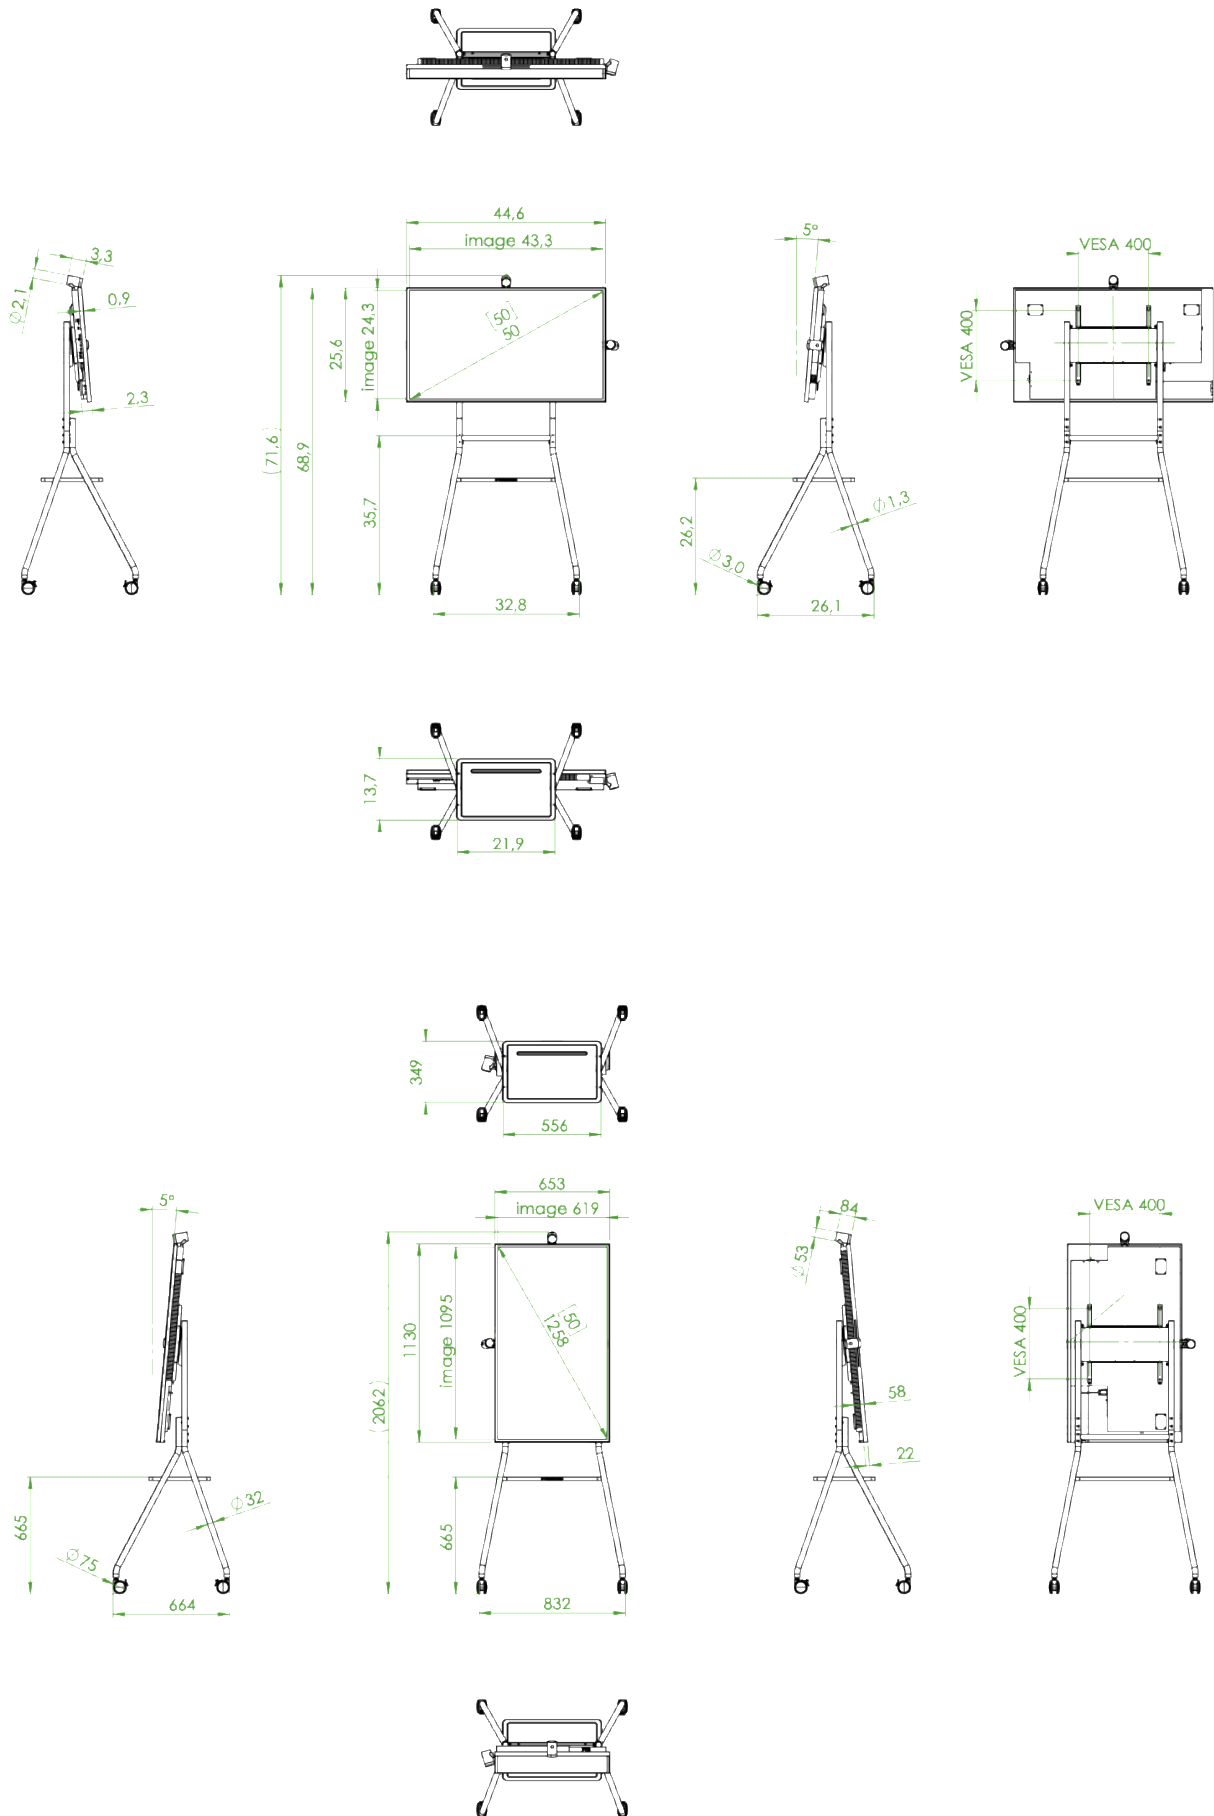


# TECHNICAL DRAWINGS ( i3SIXTY 3 65" )

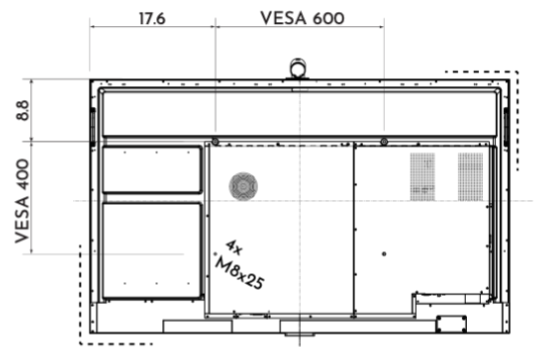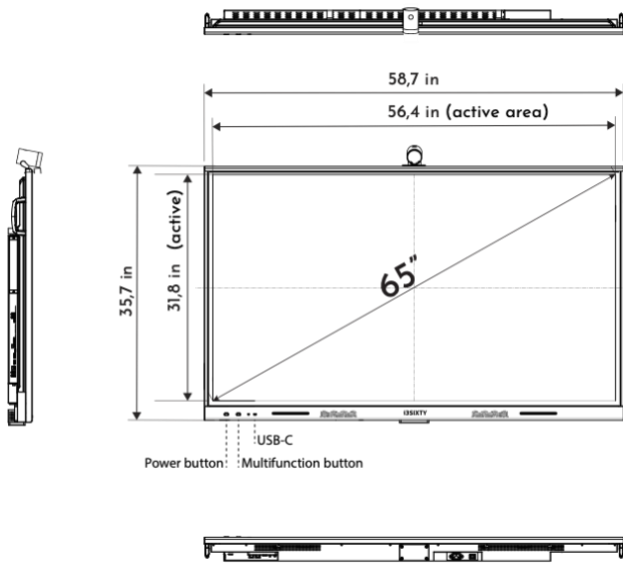

Keep a minimum distance of 5mm around the outer area of the unit.

Model Name: i3SIXTY 65 ANSI-in

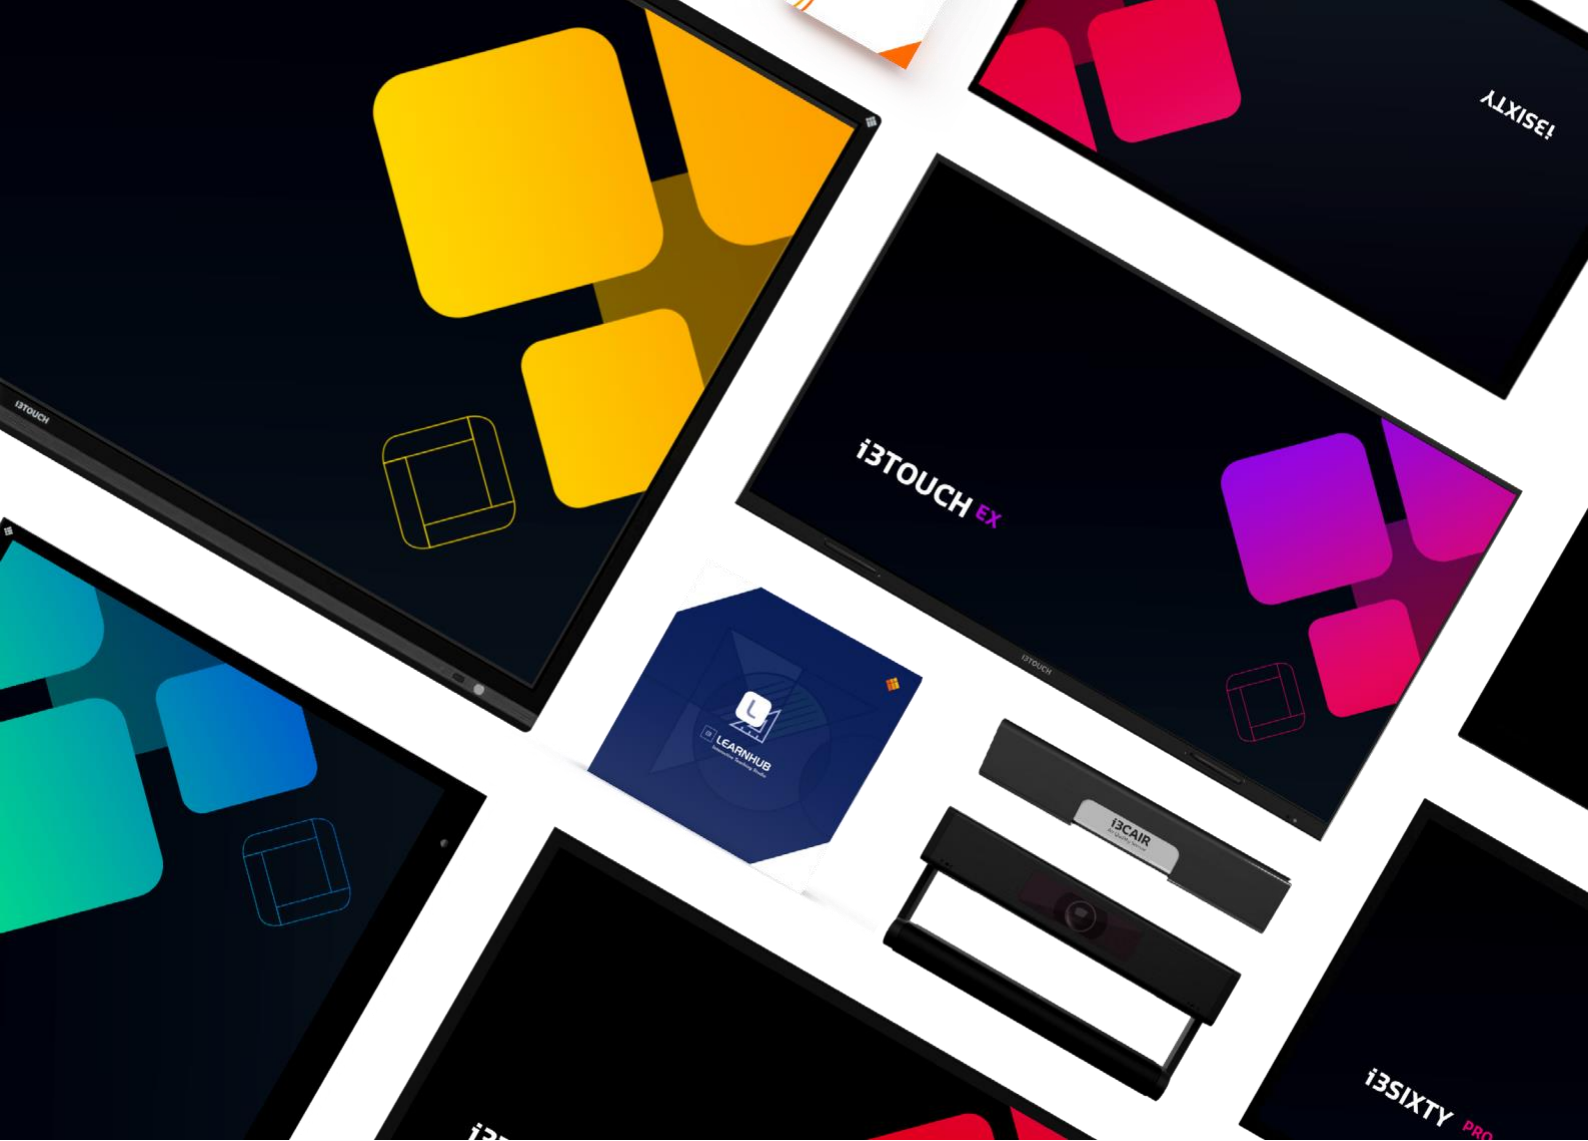

# Like to know more ?

## Get in touch

i3-TECHNOLOGIES HQ  
Kleine Schaluinweg 7  
3290 DIEST  
Belgium

TEL: + 32 56 313 415  
MAIL: [info@i3-technologies.com](mailto:info@i3-technologies.com)

## Book a demo

Please complete the "book a demo" form and we will get in touch to arrange a virtual tour or work together to see if there are possibilities to book a personal demo near your location.

[Book a demo](#)