

i3SIXTY 3

Discover the features

PRODUCT PROPERTIES

Model	I3SIXTY 3 display 50"	I3SIXTY 3 display 65"
Product ID	10010630 (display) 10010675 (display + mobile stand)	10010631 (display)

DISPLAY SPECIFICATIONS

Display Technology	Liquid Crystal Display (LCD)	
Backlight technology	Direct-LED backlight	
Panel size	50"	65"
Display aspect ratio	16:9	
Native resolution	3840 x 2160 Pixels - 4K Ultra High Definition	
Brightness (typical)	450 cd/m ²	
Contrast ratio (typical)	4000:1	
Viewing angle	178° / 178°	
Color depth	1.07 billion colors (10 bit)	
Response time (typical)	8 ms	
Refresh rate	60 Hz (@ UHD)	
Surface	Tempered glass, anti-reflection	
Supported orientation	Landscape & Portrait	
Life time	50.000 hours 16/7	

CONNECTIVITY

Video & audio input	2x HDMI	HDMI IN 2.0*1, HDMI IN 2.0(ARC)*1
	1x DP	1 x DP
	1x Type-C 65W, 1x Type-C 15W	1x Type-C 100W, 1x Type-C 15W
	1x COAX	1x COAX
	1x audio in	1x audio in
Video & audio output	1x HDMI	1x HDMI
	1x 3.5mm audio jack	1x 3.5mm audio jack
	1x Digital audio out	1 x Line out
USB ports	2x USB 3.0 Type A	2x USB 3.0 Type A
	2x USB 2.0 Type A	2x USB 2.0 Type A
	2x USB 2.0 Type B for touch	2x USB 2.0 Type B for touch
	1x Micro USB	/
Network Connectivity	2x LAN: RJ-45 connector (1000 Mbit/sec)	1 x RJ45 IN*1, 1 x RJ45 Out
	1x RS232	1x RS232
	Wi-Fi 802.11 b/g/n/ac	Wi-Fi 802.11 b/g/n/ac
Other	TC card reader (for internal use)	1 x TF CARD (for internal use)

OPERATIONAL SPECIFICATIONS

Operating System	Android 13
Memory	8GB RAM – 128 GB storage
CPU	Octa-core ARM CPU
Interactive touch	Technology: Capacitive
	Connection protocol: HID (Human Interface Device)
	Touch points: 20 simultaneous multi-touch points
Loudspeakers	2x 20-Watt Speakers

PHYSICAL PROPERTIES

VESA Mounting Pattern	400 x 400	
Net weight	TBD	
Packaged weight	TBD	
Dimensions	113,4 x 5,5 x 65,4 cm	TBD
Packaging dimensions	TBD	

ELECTRICAL PROPERTIES

Input Power	100V ~240V, 50/60 Hz
Power Consumption	TBD

ACCESSORIES

Included	Quick start guide
	Active stylus
	Power cable EU
	Wall mount (65")

SOFTWARE FEATURES

User Interface	i3STUDIO Launcher
Whiteboarding Software	i3WHITEBOARD
Annotation Software	i3WHITEBOARD
Screen casting Software	i3ALLSYNC wireless presenting
Device Management	i3RDM (optional)
Web browser	Chromium
Conferencing Software	Zoom, MS Teams or others
Device Management	i3RDM (optional)
App store	i3STORE & Google Play Store

ENVIRONMENTAL CONDITIONS

Operating Temperature	0°C- 40°C
Operating Humidity	10%-90%, RH Non-Condensing
Operating maximal altitude	5 000 meters
Storage Temperature	-20°C - 40°C
Storage Humidity	10% -90% RH Non-Condensing

REGULATORY INFORMATION

Type Approval	CE & FCC
---------------	----------


WARRANTY

Standard Warranty	3 years, upgradable to 5 years
-------------------	--------------------------------



NOTICE

Exclusive design by i3 – subject to change.

TECHNICAL DRAWINGS (i3SIXTY 3 50")

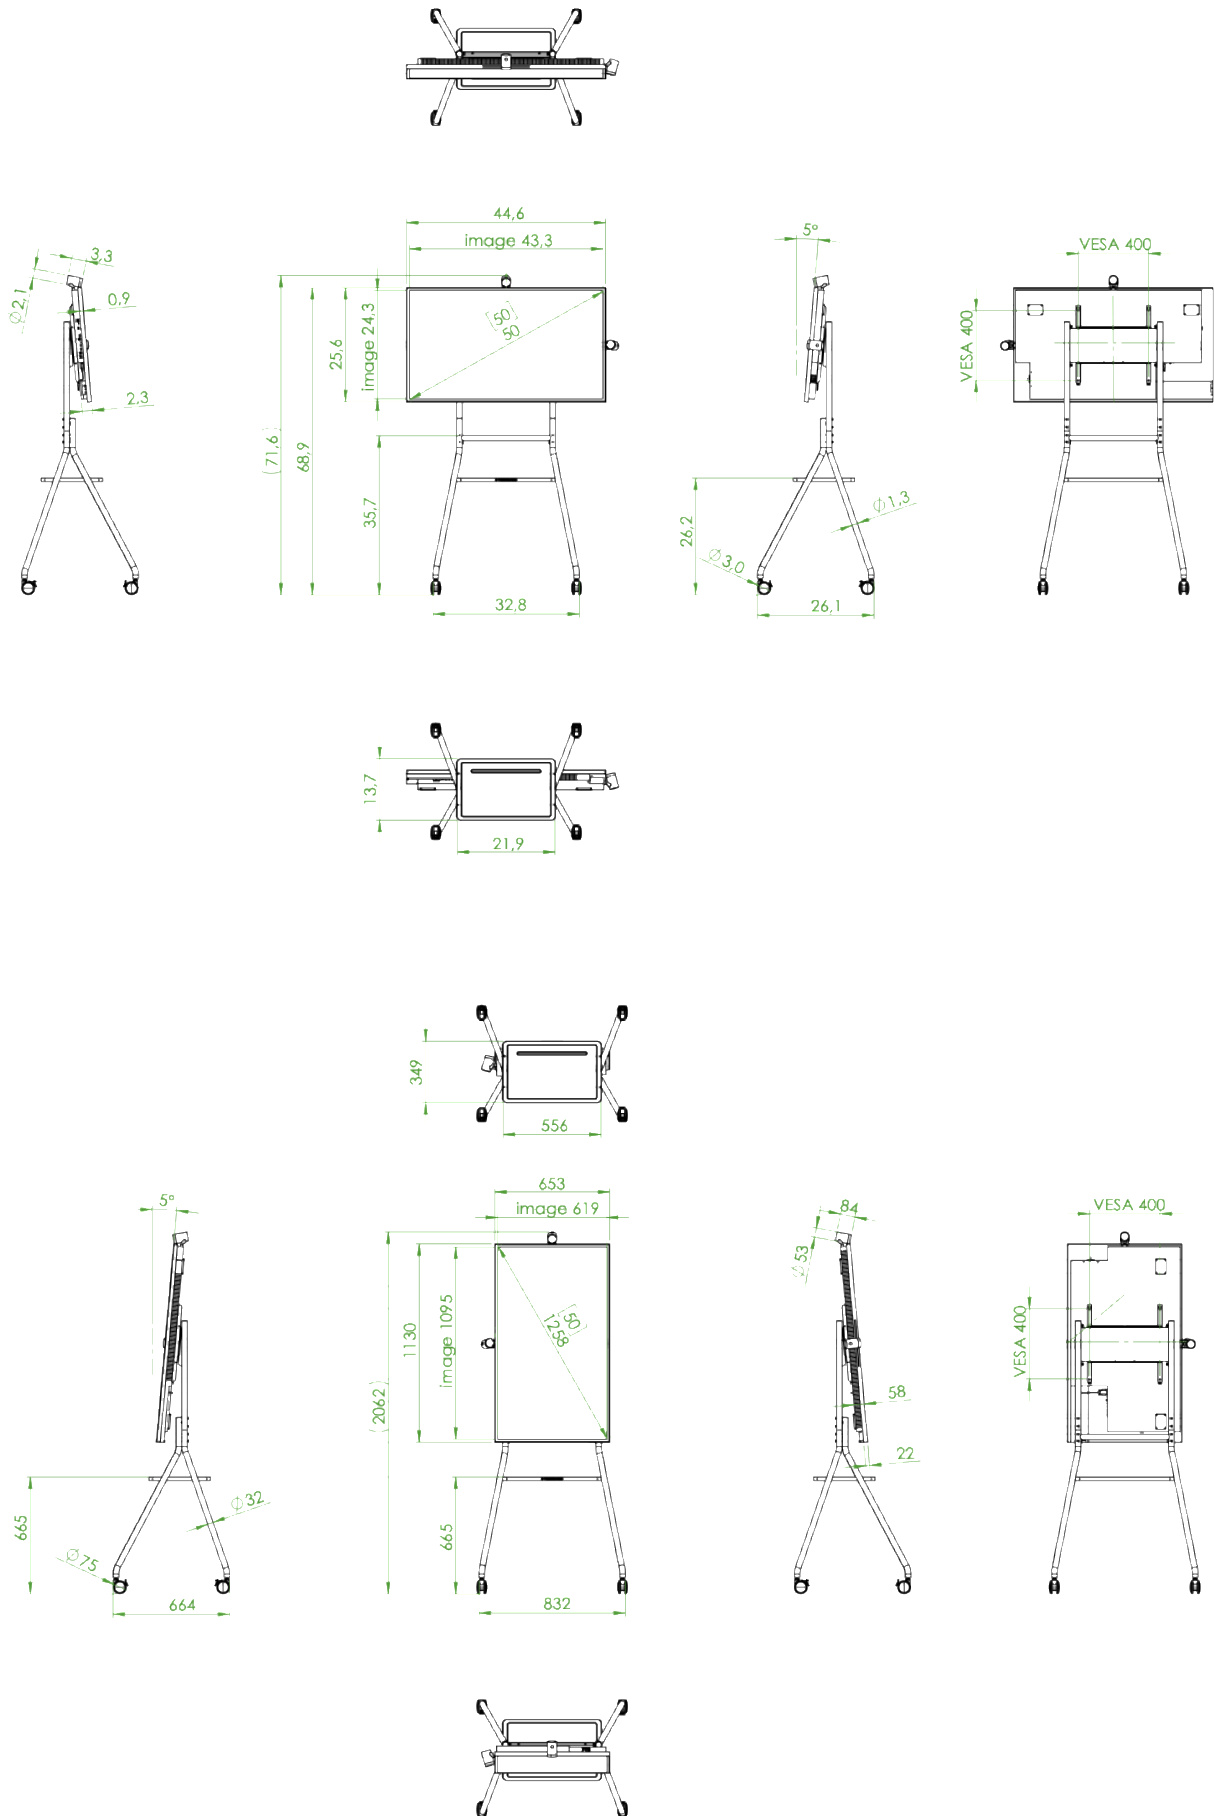

TECHNICAL DRAWINGS (i3SIXTY 3 65")

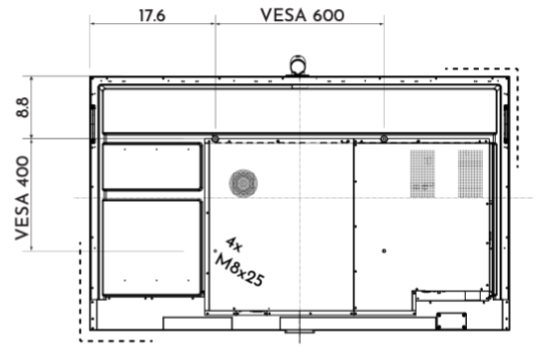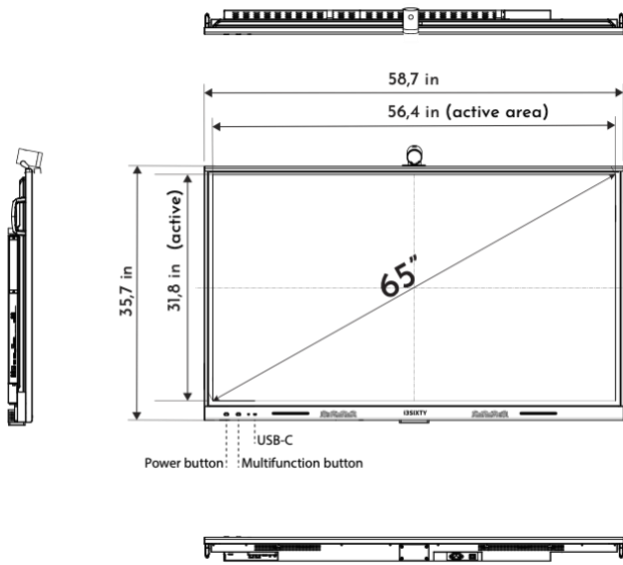

Keep a minimum distance of 5mm around the outer area of the unit.

Model Name: i3SIXTY 65 ANSI-in



Like to know more ?

Get in touch

i3-TECHNOLOGIES HQ
Kleine Schaluinweg 7
3290 DIEST
Belgium

TEL: + 32 56 313 415
MAIL: info@i3-technologies.com

Book a demo

Please complete the "book a demo" form and we will get in touch to arrange a virtual tour or work together to see if there are possibilities to book a personal demo near your location.

[Book a demo](#)