

i3SIXTY R The most advanced digital flipchart



The i3SIXTY R is a mobile and interactive display that's just about ready for anything. Whiteboard or present effortlessly on the rotatable FullHD screen, cast to nearby screens, annotate on everything and much more.

Top features



Annotate

Easily create & export annotations on every screen or application you use, even on external devices connected.



Present

Share your screen wirelessly With the i3ALLSYNC app or new i3ALLSYNC HDMI transmitter.



Browse

Bring your content to life with the integrated browser.



90° screen rotation

Toggle between landscape and portrait mode to optimally accommodate different types of content.



Simple Notetaking

Take quick notes in the i3NOTES whiteboarding app.



Cast to

Mirror your i3SIXTY display to your other devices.



Pressure sensitive Active Pen included and compatible with Microsoft Ink.



i3SIXTY R OnAir Pack

Upgrade your i3SIXTY R to the ultimate video conferencing tool with the OnAir pack, which consists of a colorful back cover of your choice, a full HD wide angle camera and pre-installed Zoom application.




CAMERA (OnAir Pack only)

Sensor	1/2.7", CMOS, Effective Pixel: 2.07M
Scanning mode	Progressive
Lens mount	M12
Lens	Focus: f=3.1mm, FOV: 120°
Autofocus	Support (only 84" support)
Minimal Illumination	0.05 Lux @ (F1.8, AGC ON)
Shutter	1/30s ~ 1/10000s
White Balance	Auto, Manual VAR
Camera Bracket	Bracket with damper
Digital Noise Reduction	2D, 3D digital noise reduction
Backlight compensation	Support
Mounting	Adjustable mounting clip and tripod mount



White
RAL 9010
PANTONE 9345 C

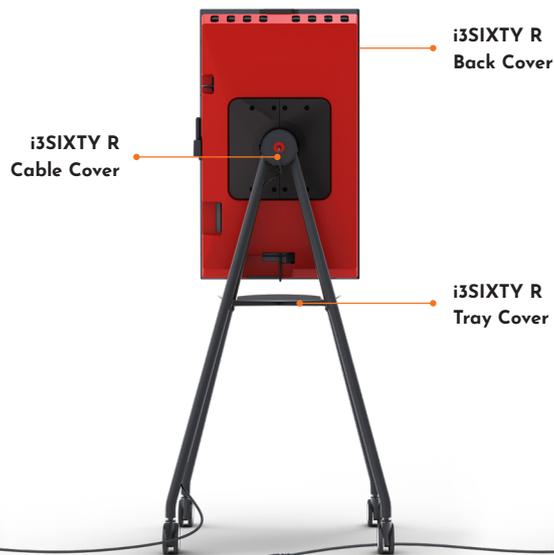

Red
RAL 3000
PANTONE 7620 C



Blue
NCS S5040R80B
PANTONE 654 C

Specifications

PRODUCT INFORMATION

Model name	i3SIXTY S4300
Product series	i3SIXTY Digital Flipchart Display
Product order code	VSV0005939

DISPLAY SPECIFICATIONS

Display technology	Liquid Crystal Display (LCD) with DirectLED backlight
Panel Size	43"
Display aspect ratio	16:9 aspect ratio
Display native resolution	i3SIXTY interface: 1920 x 1080 pixels - FHD HDMI input: 3840 x 2160 pixels - 4K UHD
Brightness	300 cd/m ²
Contrast ratio	4000:1
Viewing angle	178° / 178°
Colour depth	1.073 billion colours (10 bit)
Response time (typ.)	8 ms
Refresh rate	60 Hz (@ UHD)
Supported orientation	Landscape and Portrait

ELECTRICAL PROPERTIES

Power voltage	110 ~ 240 Volt - 50/60 Hz
Power consumption	128 Watt (operation) - < 0.5 Watt (standby)

ENVIRONMENTAL CONDITIONS

Operating temperature	5°C to 35°C
Operating humidity	35% to 85% RH
Storage temperature	-20°C to 60°C
Storage humidity	35% to 85% RH

PHYSICAL PROPERTIES

Product dimensions	1014 mm x 617 mm x 74 mm (40" x 24.5" x 3")
Net product weight	20 kg (44 lbs)
Mounting pattern	VESA 300 x 300
Color	Black front bezel, black back cabinet

SOFTWARE FEATURES

i3NOTES Whiteboarding application	Make notes and share immediately with every device.
i3OVERLAY Screen annotation application	Annotate on top of every image/app/site & save your content in i3NOTES.
i3ALLSYNC Wireless video cast application	Share your content wirelessly from any device by using the Windows app (min: Windows 7), the MAC OSX app (min OSX 10.10), AirPlay for iOS and the Android (Play Store, min. Android 5.0). Wireless touch function and audio transmission on Windows & OSX. Up to 64 devices can use the remote view simultaneously to follow the meeting.
Cast To Wireless Video Cast Application	Mirror your i3SIXTY Display to your i3HUDDLE 3.0 or compatible i3TOUCH.
ZOOM Video Conference Application	Zoom software allows you to have easy conference meetings.
Others	Web browser, File Explorer

CONNECTIONS

Video Input	1x HDMI 2.0
Touch Output	1x Touch USB (Type-B)
Data Input	2x USB 2.0 (Type-A)
Communication	1x RJ45 LAN and Wi-Fi
Audio output	2x Integrated Speakers 5W

OPERATIONAL FEATURES

	Technology: C-Sense Capacitive Touch recognition
	Input Detection: 10 touch inputs
	Touch Connection: 1x USB 2.0 Type-B
Interactive touch	Recognition: Finger or Active Stylus (incl.)
	Response time: < 25 ms
	Accuracy: < 1 mm
Languages	English

WARRANTY

Standard warranty 3 years

ACCESSORIES

Included	USB Flash Drive with User Guides
	Active Touch Stylus (Pressure Sensitivity & Windows Ink supported)
	Mobile stand
	Quick Start Guide
	HDMI (1,8m)
	Touch USB cable (1,8m)
Optional	EU/UK/US power cord (1,8m)
	i3HUDDLE Meeting Display solution i3ALLSYNC HDMI Transmitter

REGULATORY INFORMATION

Product type approval CE: EMC + RoHS, FCC: Part 15, CB

i3ALLSYNC REQUIREMENTS

	Laptops & Tablet PCs	iPads, iPhones & iPods	Android Tablets & Phones
Operating System	Windows 7 or newer OSX 10.10 or newer	iOS version 7.0 or newer	Android 5.0 or newer
Minimum Required	Intel Core i3 4th generation, 4 GB RAM	iPad 3 / iPhone 5 or newer	Phones/Tablets with Android 5.0 or newer
Network Requirements	When i3ALLSYNC is deployed into the existing network, the host PC and the clients require wired or wireless network connection with a minimum bandwidth of 20 Mbps and peer-to-peer sharing enabled. When running HD content, increase the minimum bandwidth to 50 Mbps. Like any network application, the overall performance is dependent on available bandwidth. Internet access is also required to update the i3ALLSYNC receiver app.		
Functionality	Screen mirroring from any device (with minimum device requirements)		
	FHD resolution		
	Wireless touch function on Windows & MAC OS. Up to 64 devices can use the remote view simultaneously to follow the meeting.		
App available in the Apple store, Play store and on i3-allsync.com.			
Annotate on all share images and save your content in i3NOTES whiteboard			

Technical Drawings

