A size for every space.

Not your traditional whiteboard

Compared to traditional whiteboards, the i3BOARD includes several unique features. Other than finger and stylus touch recognition, the recognition of the stylus can activate Windows Ink allowing for quick annotation in Powerpoint or Snip&Sketch, idea sharing and collaborating in the Windows Ink Workspace.

Touch recognition
Finger, stylus or any other pen or finger shaped object

Touch Points
Up to 20 touch points

Sleek
Ultranarrow 24mm frame

Platform independent
A perfect match for any education software

V-Sense
Dust resistant V-Sense touch technology

77" 87" 100"
Different sizes
The i3BOARD has different sizes available

Windows Ink
i3BOARD activates Windows Ink by using the stylus

i3-technologies.com
sales@i3-technologies.com

Specifications	77"	87"	100"
PRODUCT SPECIFICATIONS			
Model name	i3BOARD 7706	i3BOARD 8706	i3BOARD 10006
Display Aspect Ratio	4:3	16 : 10	16 : 9
PHYSICAL SPECIFICATIONS			
Dimensions i3BOARD	1615 x 1226 mm - 63.6" x 48.26" (WxH)	1939 x 1226 mm - 76.33" x 48.26" (WxH)	2157 x 1232 mm - 84.9" x 48.5" (WxH)
Dimensions active area	1558 x 1168 mm 61.33" x 46" (WxH)	1881 x 1168 mm 74.05" x 46" (WxH)	2099 x 1174 mm 82.63" x 46.22" (WxH)
Whiteboard Surface	i3 Duo Surface The optimized whiteboard surface with superior projection, writing & dry erasing capabilities. Minimize hotspot, less reflectivity from natural light & minimal ghosting	i3 Duo Surface The optimized whiteboard surface with superior projection, writing & dry erasing capabilities. Minimize hotspot, less reflectivity from natural light & minimal ghosting	i3 Duo Surface The optimized whiteboard surface with superior projection, writing & dry erasing capabilities. Minimize hotspot, less reflectivity from natural light & minimal ghosting
Touch technology	V-Sense^{FC} Multi-touch		
Touch operation	Finger, Passive Stylus (Supports Windows Ink with the included stylus)		
Touch point	20 simultaneous touches (Depending on Operating System)		
Resolution	32767x32767		
Bezel Color	Black		
Power supply	USB		
Install method	Wall mount included		
Weight net	TBA	TBA	TBA
Weight packed	TBA	TBA	TBA
Packaging size	1780 x 1345 x 120 mm (WxHxD)	2085 x 1355 x 120 mm (WxHxD)	2315 x 1355 x 120 mm (WxHxD)
Operating temperature	-15 ~ 50 °C (5~122F)		
Operating humidity	20 ~ 90 %		
Storage temperature	-40 ~ 50 °C (-40 ~ 122 F)		
Storage humidity	10 ~ 95 %		
Power consumption	≤ 350mA		
RECOMMENDED COMPUTER CONFIGURATION			
CPU	> 3.4GHz . X86		
RAM	> 4GB		
Hard disk	> 100GB		
Interface	USB 2.0 or above		
Screen resolution	1024 x 768	1280 x 800	1280 x 720
ACCESSORIES			
Included	USB Cable, 2x Passive Stylus, Pen Tray		
Annotation software	i3LEARNHUB Free licence - registration on i3learnhub.com		
WARRANTY			
Standard	3 years		

Optional accessories

i3PROJECTOR
Laser projectors

Technical drawings

i3BOARD 77”

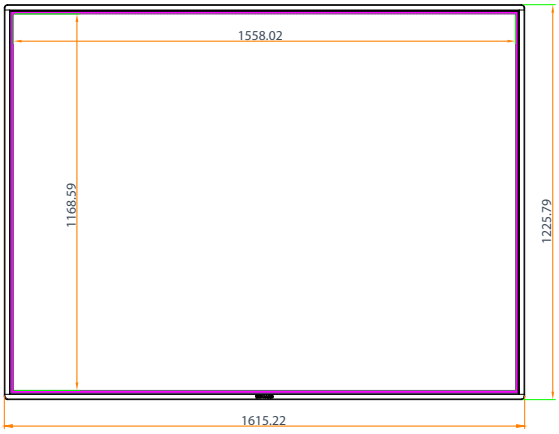

i3BOARD 87”
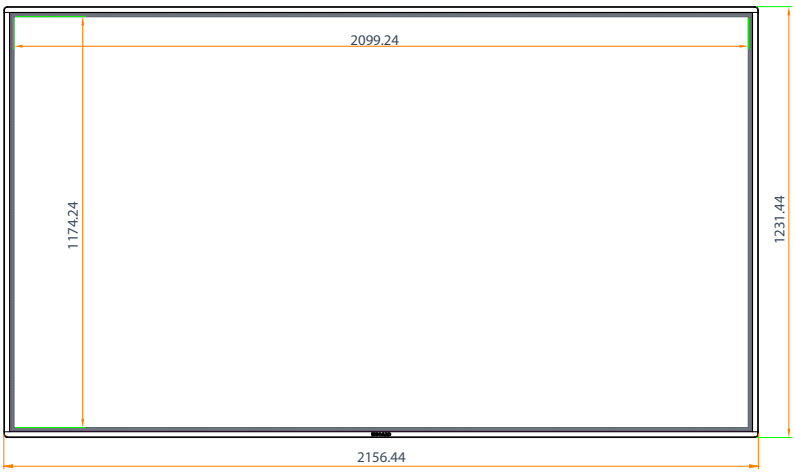
i3BOARD 100”